



Capacitive Sensors



Series 80 - PNP

Housing Ø = 26 mm/ 1" / 40 mm

- Housing material PTFE
- Useable for an ambient temperature up to +100° C
- SIP / CIP 121° C
- Ideal of detection of chemically aggressive media
- Suitable for foods and pharmaceutical applications
- Special version with flange. Sealing can be made with a gasket or PTFE-tape (not supplied with the sensor)



Technical data	Non-flush mountable
Operating distance Sn	5 mm
Operating distance min./max. adjustable	0...20 mm
Electrical version	4-wire DC
Output	Antivalent (NO + NC)
Type PNP	KAS-80-26/113-A-G1-PTFE-100C-Z02-1-HP
Art.-No.	KA 0277
Operating voltage (U _B)	10...35 V DC
Operating current (I _e)	2 x 250 mA
Voltage drop max. (U _d)	≤ 2.0 V
Permitted residual ripple max.	10%
No-load current (I _o)	Typ. 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+100° C / CIP 121° C (zero-current)
LED-display	Green/yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 4 x 0.5 mm ²
Housing material	PTFE (FDA 21 CFR 177.1550)
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA

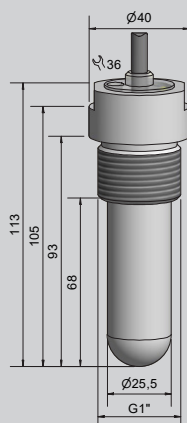

Made in Germany