




Capacitive filling level probe
Series LS
Article number: LS0307
Description: XS8G-280/380L10

- Level probe with coated active zone
- 1 or 2 switching points and analogue evaluation
- For connection to LA capacitive evaluators
- Housing material (active zone): AL / PEEK / VA

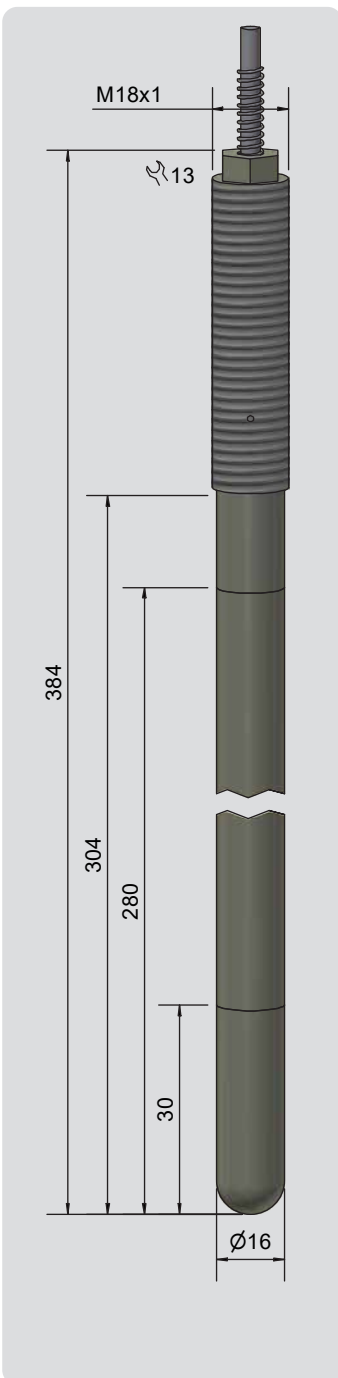

Technical data

Active zone / switching range in relation to probe tip	1 - 280 mm
Probe length	384 mm
Sensitivity adjustment	On the evaluation unit
Connection	Binder bayonet series 678, 3-pole
Cable length including plug	approx. 980 mm
Degree of protection IEC 60529	IP 40
Permitted ambient temperature probe (active zone)	-10°C...250°C
Permitted ambient temperature cable	-10°C...200°C
Norm	EN 60947-5-2, where applicable
Housing material active zone	Aluminium / PEEK / stainless steel
Housing material lid	Stainless steel
Housing (active zone)	Ø 16 mm
Housing size / Process connection	M 18 x 1
For connection to evaluators	LA0111
Accessories	2 nuts M18 x 1

Made in Germany