



Power Supply Series 130 - Relay Output


Housing: 22 x 92 x 107 mm

- To connect one 2, 3 or 4-wire sensor with NPN or PNP transistor output. When connecting an antivalent sensor (4-wire) the NO or NC output can be connected.
- With one output relay (1 x change over)



Technical data	
Operating voltage (U_B)	115 / 230 V AC \pm 15 % 40...60 Hz
No-load current (I_o)	Typ. 20 mA
Output function	1 x potential-free change-over contact
Contact rating each relay max.	250 V AC / 6A
Type	EGI-130 115/230 VAC
Art.-No.	522 000
Actuating voltage (U_s)	24 V DC \pm 20 %
Actuating current max. (I_s)	60 mA
Residual ripple acc. to DIN 41 755 max.	2 %
Actuating signal	PNP or NPN
Permitted ambient temperature	-25...+80 °C
LED-display	Green / Yellow
Degree of protection IEC 60529	Housing: IP 30 Connections: IP 20
Norm	EN 60 947-5-2
Connection	Screw terminals
Housing material	ABS

All specifications are subject to change without notice. (10.09.2020)

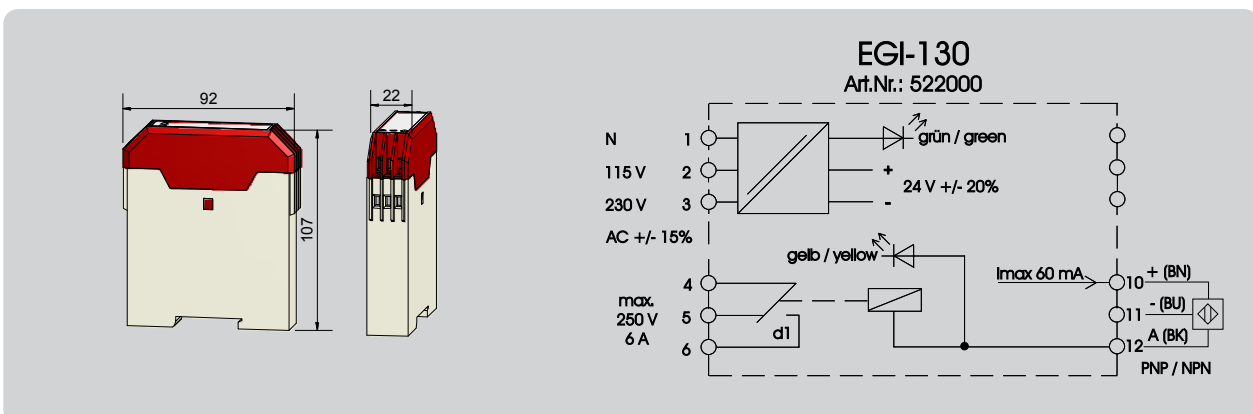

Made in Germany