



Inductive Sensors








Series 10 - PNP

Housing M 12 x 1

- Housing material: Brass
- Sensing distance $S_n = 4$ mm



Technical data	Flush mountable
Operating distance S_n	4 mm
Electrical version	3-wire DC
Output	Normally open (NO)
Type NPN	
Art.-No.	
Connection diagram No.	
Type PNP	IAS-10-A12-S-SN4
Art.-No.	IA 0184
Connection diagram No.	4
Operating voltage (U_B)	10...30 V DC
Output current max. (I_o)	200 mA
Voltage drop max. (U_d)	≤ 2 V
Permitted residual ripple max.	20 %
No-load current (I_o)	Typ. 10 mA
Frequency of operating cycles max.	2 kHz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 3 x 0,14 mm ²
Housing material	Brass
Active surface	PBTP
Lid	PA

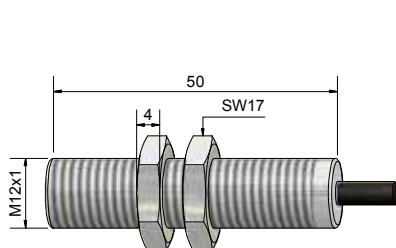

Made in Switzerland

Tutti i dati sono soggetti a variazione senza preavviso. (05/2013)