





Capacitive Sensors Series 95 - AC / DC

- Housing M 30 x 1.5
- Housing material: POM
 - Sensing distance 2...20 mm adjustable
 - Potential-free change-over contact
 - Leakage control
 - Overfill prevention



Technical data	Non-flush mountable
Operating distance S_n	15 mm
Operating distance min. / max. adjustable	2...20 mm
Electrical version	5-wire AC / DC
Output	Relay, 1 CO
Type	KAS-95-A24-1CO-K-POM
Art.-No.	KA 0747
Operating voltage (U_B)	20...250 AC / DC
Load max. AC (I, U)	1 A, 250 V
Load max. DC (I, U, P)	1 A, 220 V, 60 W
No-load current (I_o)	2,1 mA
Frequency of operating cycles max.	2 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67*
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 5 x 0,34 mm ²
Housing material	POM
Active surface	POM
Lid	PA
Accessories (delivered with the sensor)	2 nuts M 32 x 1.5

*With sealed potentiometer

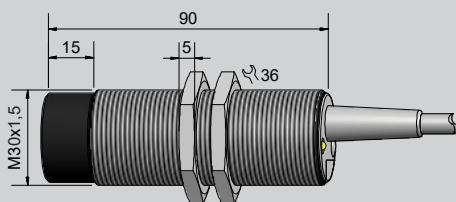

Made in Germany