



Capacitive sensors Series - KXS-Extreme

Housing M 12 x 1

- Housing material: PPO
- For connection to capacitive evaluation units KXA-...-MINI
- Extreme large sensing distance


Certificate:



Technical data

Operating distance S_n	15 mm
Operating distance min / max adjustable	1...25 mm
Mounting	Flush / non-flush
Type	KXS-M12/50-K
Art.-No.	KX 0054
Permitted ambient temperature	-25...+70 °C
Enclosure rating IEC 60529*	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-...-MINI with plug-in connector	2 m FEP, Triax
Housing material	PPO
Active surface	PPO

*Enclosure rating IEC 60529 for connector on request.

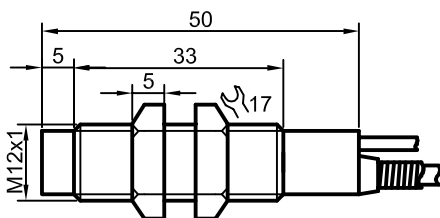

Made in Germany

All specifications are subject to change without notice. (10/2011)