

Capacitive sensors Series - KXS

Housing Ø 30


- Housing material: PTFE
- For connection to capacitive evaluation units KXA-...-MINI

Certificate:



Technical data

Operating distance S_n	20 mm
Operating distance min / max adjustable	2...30 mm
Mounting	Flush / non-flush
Type	KXS-30/70-KB-PTFE-160°C
Art.-No.	KX 0087
Permitted ambient temperature	-25...+160 °C
Enclosure rating IEC 60529*	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-... with plug-in connector	0.3 m FEP, Triax
Housing material	PTFE (FDA 21 CFR 177.1550)
Active surface	PTFE (FDA 21 CFR 177.1550)

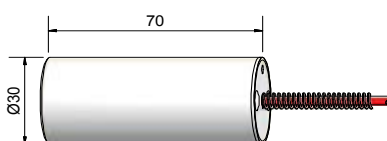

All specifications are subject to change without notice. (01.11.2011)

Made in Germany