



LevelMaster - Capacitive Sensors - S26

Model G 1/2"

- For level control of conductive and/or viscous liquids or pastes, for instance oil, water, ketchup or honey.
- · Ideal for level control in the Food Industry or Pharmaceutical Industry
- Housing material: Stainless steel (VA)
- Adjustment of the sensitivity with ETW- Function (EasyTeach by wire)
- With flange connector M 12 x 1
- Welding sockets and Varivent adapter available for EHEDG conform mounting.
















(
Technical data	Non-flush mountable
Sensitivity	Dielectric constant $\mathcal{E}_{r} > 1.25$
Electrical version	3-pin DC
Output function	Normally closed (NC)
Factory setting	Water
Typ PNP	KS-801-26/86-Ö-G1/2-PEEK/VAb-Y3-ETW-HP
Art. No.	KA 1469
Operating voltage (U _B)	12.535 V DC
Voltage drop max. (U _d)	≤ 2.0 V
Operating current (I _e)	0250 mA
No-load current (I _o)	Typ. < 30 mA
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	-10+70 °C / CIP 121 °C
Permitted product temperature	0+100 °C
LED-display	Green / orange
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67, IP 69K
Norm	EN 60947-5-2*
Connection	Connector M 12 x 1
Operating pressure	Max. 10 bar
Housing material	Stainless steel VA No. 1.4305 / AISI 303
Material active surface	PEEK (FDA 21 CFR 177.2415)
Accessories (not supplied with the sensor): Varivent Adapter art.No. 196395, Welding Socket art.No. 196394 and matching connectors please see our selection of accessories.	

Capacitive Sensors of the S26 series with hemispherical active surface for level control of products with a dielectric constant ε_r from 1,25. Products such as:


 Liquids, like, juice, wine,oil, chemicals or pharmaceutical solutions and much more.

Highlights:

- · EHEDG conform
- Measurement is independent of the mounting position
- Permitted pressure on the active area: 10 bar



^{*}Where applicable

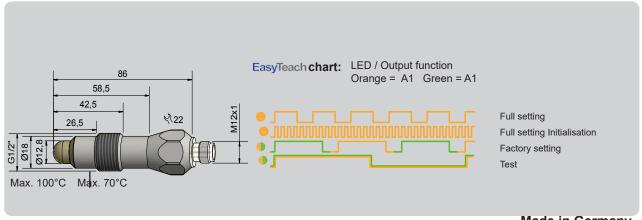

Made in Germany