


LevelMaster Capacitive Sensors - S26

Model G 1"

- For level control of conductive and/or viscous liquids or pastes, for instance oil, water, ketchup or honey.
- Ideal for level control in the Food Industry or Pharmaceutical Industry
- Housing material: Stainless steel VA No. 1.4305 (AISI 303) •
- Adjustment of the sensitivity with ETW- Function (EasyTeach by Wire) •
- With flange connector M 12 x 1 •
- Welding sockets and Varivent adapter available for EHEDG conform mounting. •

Technical data	Non-flush mountable	
Sensitivity	Dielectric constant $\varepsilon_r > 1.25$	Capacitive Sensors of the series with hemispherical ac surface for level control of pu ucts with a dielectric constant from 1,25. Products such as:
Electrical version	3-pin DC	
Output function	Normally open	
Factory setting	Water	
Тур РМР	KS-801-26/86-S-G1-PEEK/VAb-Y3-ETW-HP	Liquids, like, juice, wine chemicals or pharmace cal solutions and much mo
Art. No.	KA 1471	
Operating voltage (U _B)	12.535 V DC	Highlights:
Voltage drop max. (U _d)	≤ 2.0 V	
Operating current (I _e)	0250 mA	EHEDG conform
No-load current (l _o)	Typ. < 30 mA	 Measurement is independent the mounting position Permitted pressure on the a area: 10 bar
Frequency of operating cycles max.	1 Hz	
Permitted ambient temperature	-10+70 °C / CIP 121 °C	
Permitted product temperature	0+100 °C	
_ED-display	Green / orange	
Protective circuit	Built-in	
Degree of protection IEC 60529	IP 67, IP 69K	
Norm	EN 60947-5-2*	
Connection	Connector M 12 x 1	
Operating pressure	Max. 10 bar	
Housing material	Stainless steel VA No. 1.4305 / AISI 303	C BN / 1 BK / 4 BU / 3
Material active surface	PEEK (FDA 21 CFR 177.2415)	
Accessories (not supplied with the senso connectors please see our selection of ac	r): Varivent Adapter, Welding Socket and matching cessories.	PNP WH / 2 TEAC

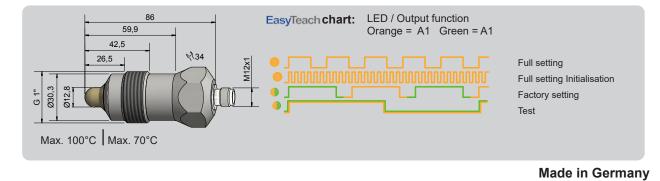

1

RECHNER

LevelMaster

This capacitive sensor is designed for the level control of liquid or viscous products, which can be conductive and/or viscous and sticky.

Materials like ketchup, mayonnaise, yoghurt, syrups, pastes, or liquids with salt or acids will be reliably detected with the LevelMaster.



It could not be easier. The user mounts the sensor, makes the electrical connection and the adjustment by means of the teach wire and the sensor is ready for use.

No additional teach equipment necessary.

Optical guidance during the teach process with the aid of a 2-colour LED: • standby • teach process • switching state

The modern micro controller controlled temperature compensation provides for reliable level control with applications where there are variations in the ambient temperatures.

The sensor body is made of stainless steel material No. 1.4305 (AISI 303).

When the sensor is mounted with our adapters: welding socket or the process adapter Varivent N DN 50 a hygienic, EHEDG conforming process connection will be achieved.



RECHNER Industrie-Elektronik GmbH • Gaußstraße 6-10 • D-68623 Lampertheim • Tel. +49 6206 5007-0 • Fax +49 6206 5007-36 • e-mail: info@rechner-sensors.de • www.rechner-sensors.com