



## LevelMaster - Capacitive Sensors - S26

Model G 1/2"

For level control of conductive and/or viscous liquids or pastes, for instance oil, water, ketchup or honey. Ideal for level control in the Food Industry or Pharmaceutical Industry

- Housing material: Stainless steel VA No. 1.4305 (AISI 303)
- Adjustment of the sensitivity with ETW- Function (EasyTeach by wire)
- With flange connector M 12 x 1
- Welding sockets and Varivent adapter available for EHEDG conform mounting




Technical data	Non-flush mountable
Sensitivity	Dielectric constant $\epsilon_r > 1.25$
Electrical version	3-pin DC
Output function	Normally open
Factory setting	Water
Typ PNP	KS-801-26/136-S-G1/2-PEEK/VAb-120C-Y3-ETW-HP
Art. No.	KA 1562
Operating voltage ( $U_B$ )	12.5...35 V DC
Voltage drop max. ( $U_d$ )	$\leq 2.0$ V
Operating current ( $I_e$ )	0...250 mA
No-load current ( $I_o$ )	Typ. < 30 mA
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	0...+70 °C / CIP 121 °C
Permitted product temperature	-10...+120 °C
LED-display	Green / orange
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67, IP 69K
Norm	EN 60947-5-2*
Connection	Connector M 12 x 1
Operating pressure	Max. 10 bar
Housing material	Stainless steel VA No. 1.4305 / AISI 303
Material active surface	PEEK (FDA 21 CFR 177.2415)
<b>Accessories</b> (not delivered with the sensor): Varivent Adapter art.No. 196395, Welding Socket art.No. 196394 and matching connectors please see our selection of accessories.	

Capacitive Sensors S26 with hemispherical active surface for level control of products with a dielectric constant  $\epsilon_r$  from 1,25. Products can be:


- Liquids, like water, juice, wine, oil, chemicals or pharmaceutical solutions and much more.

### Highlights:

- EHEDG conform
- Measurement is independent of the mounting position
- Permitted pressure on the active area: 10 bar



\*Where applicable

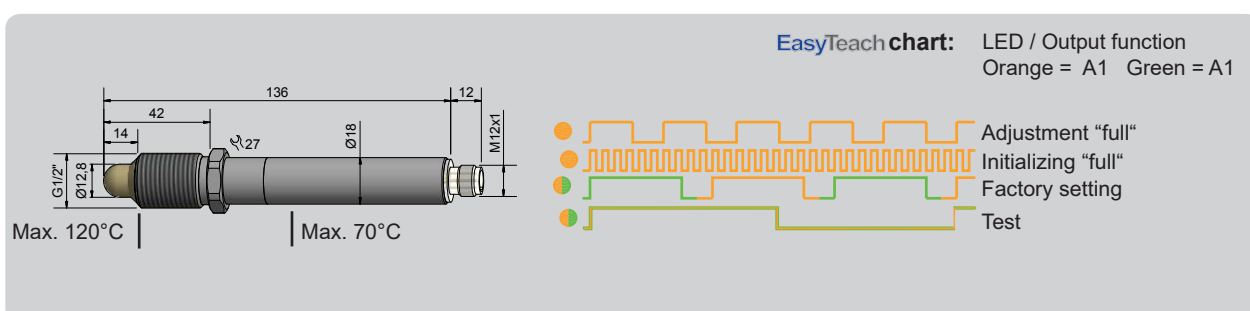

**Made in Germany**