



Y76

PER LeVeL® Capacitive Filling Level Probe - KFS
4 Limit value switching points


- For connection to the capacitive amplifier KFA-5-...-Y70
- Housing material: GFK, Ø 16 mm



Technical data

Active Zone [mm]	15, related to probe tip + 3 x type specific X2 / X3 / X4
Type for evaluation unit KFA-5-...-Y70	KFS-54-15-1300-15/X2/X3/X4-GFK-D16-X02-Y76
Art.-No.	KF 0439
Permitted ambient temperature (for active zone)	-70...+250 °C
Degree of protection IEC 60529 (probe)	IP 67
Norm	EN 60947-5-2
Connection cable to the evaluation unit KFA-5-...-Y70	2 m coax-cable with connectors*
Housing material	GFK
Housing material active zone	GFK
Accessories for mounting (not delivered with the probe) please see our selection of accessories.	

All specifications are subject to change without notice. (28.05.2019)

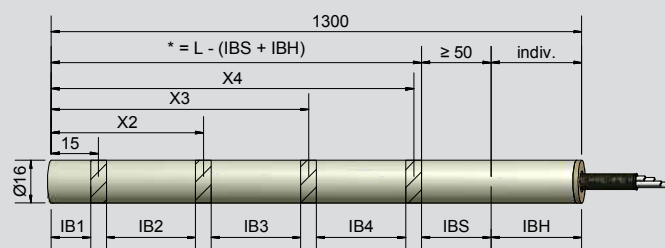

Other housing materials for the active zone (probe), like PVDF, PEEK or PE on request.

*Technical data for connectors on request.

Made in Germany