



## Power Supply Series 130 - Relay Output


- To connect three 2, 3 or 4-wire sensors with NPN or PNP transistor output. When connecting an antivalent sensor (4-wire) the NO or NC output can be connected
- With three output relays (3 x changeover)



### Technical data

Operating voltage ( $U_B$ )	115 / 230 V AC $\pm$ 15 % 40 ... 60 Hz
No-load current ( $I_o$ )	Typ. 40 mA
Output function	3 x potential-free change-over contact
Contact rating each relay max.	250 V AC / 6 A
<b>Type</b>	<b>EGIII-130 115/230 V AC</b>
<b>Art.-No.</b>	<b>NA 0002</b>
Steuerspannung ( $U_S$ )	24 V DC $\pm$ 20 %
Actuating current max. ( $I_S$ )	100 mA
Residual ripple acc. to DIN 41 755 max.	2 %
Actuating signal	PNP or NPN
Permitted ambient temperature	-25...+70 °C
Display	LED green and yellow
Degree of protection IEC 60529	Housing: IP 30 Connections: IP 20
Norm	EN 60 947-5-2
Connection	Screw terminals

All specifications are subject to change without notice. (19.11.2020)

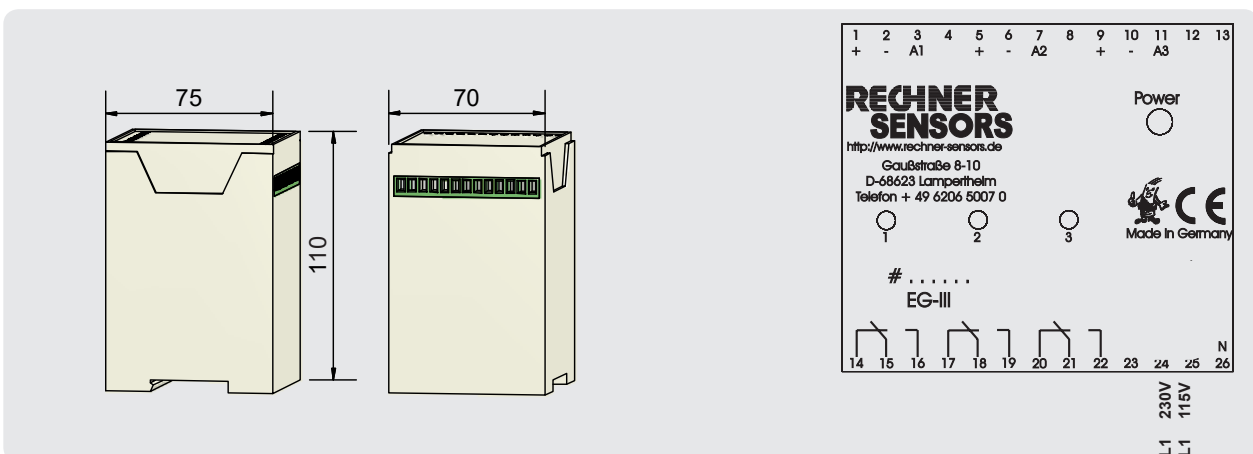

**Made in Germany**