





## Capacitive Sensors Series 80 - PNP

Housing M 12 x 1

- Housing material: PTFE
- Sensing distance 0...6 mm adjustable



<b>Technical data</b>	Flush mountable
Operating distance $S_n$	2 mm
Operating distance min. / max. adjustable	0...6 mm
Electrical version	4-wire DC
Output function	Antivalent
<b>Type PNP</b>	<b>KAS-80-A12-A-M12-PTFE-FG-Z02-1-HP</b>
<b>Art.-No.</b>	<b>KA 1693</b>
Operating voltage ( $U_B$ )	10...35 V DC
Voltage drop max. ( $U_d$ )	≤ 2.0 V
Permitted residual ripple max.	10 %
Operating current ( $I_e$ )	2 x 0...250 mA
No-load current ( $I_o$ )	Typ. 15 mA
Frequency of operating cycles max.	500 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 529	IP 67*
Norm	EN 60947-5-2
Connection cable	2 m, PUR, 4 x 0.14 mm <sup>2</sup>
Housing material	PTFE (FDA 21 CFR 177.1550)
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA
Media optimized	Yes

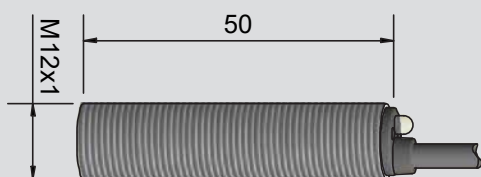

\* With sealed potentiometer screw

**Made in Germany**