



Capacitive Sensors Series 2000 - **quattro**


Housing M 32 x 1.5

- Active surface material: PTFE
- Sensing distance 2...25 mm adjustable
- Multifunction sensor: NPN / PNP;
NO / NC function switchable
- With flange connector M 12 x 1



Technical data	Flush mountable
Operating distance S_n	20 mm
Operating distance min. / max. adjustable	2...25 mm
Electrical version	3-pin DC
Output function	NO / NC switchable
Type PNP	KAS-2000-30-P-M32-PTFE/MS-Y3-1
Art.-No.	770 603
Operating voltage (U_B)	10...35 V DC
Voltage drop max. (U_d)	≤ 2.0 V
Permitted residual ripple max.	10 %
Operating current (I_e)	0...400 mA
No-load current (I_o)	Typ 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+70°C
LED-display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection	Flange connector M 12 x 1
Housing material	Bass
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA
Accessories (delivered with the sensor)	2 nuts M 32 x 1.5
Matching connectors (not delivered with the sensor)	#193391, #193392

All specifications are subject to change without notice. (18.02.2020)

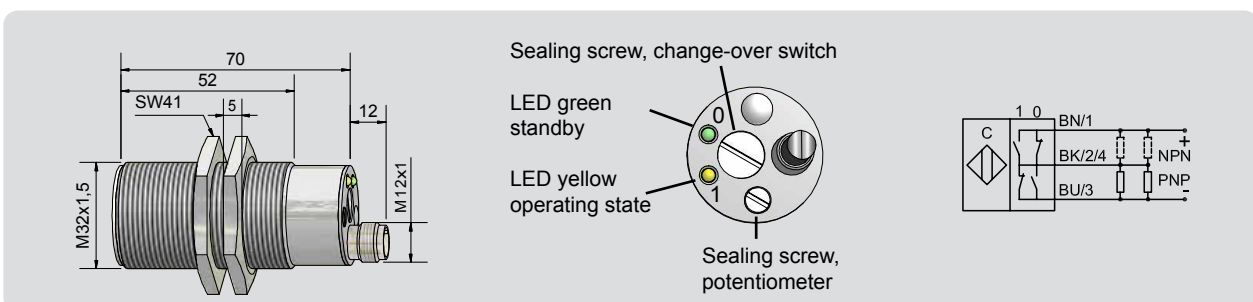

* With sealed potentiometer screw

Made in Germany