



Capacitive Sensors Series 40 - NAMUR EN 60947-5-6 - ATEX

Housing M 12 x 1

- For use in areas with the risk of gas explosion, Zone 0
- Housing material: PVC
- Sensing distance 1...6 mm adjustable
- Non-flush sensor with continuous thread

DMT 03 ATEX E 048

IECEX BVS 07.0031


Ex II 1G Ex ia IIC T1-T6 Ga

Ex ia IIC T1-T6 Ga




Technical data	Non-flush mountable
Operating distance S_n	4 mm
Operating distance min. / max. adjustable	1...6 mm
Electrical version	2-wire DC
Output function	NAMUR DIN 60947-5-6
Type	KAS-40-14-N-M12
Art. No.	400 705
Operating voltage (U_B)	U_i 15 V DC
Output current active surface free	< typ. 1.5 mA
Output current active surface covered	> typ. 2.5 mA
Self-inductance (L)	0.2 mH
Self-capacitance (C)	250 nF
Permitted residual ripple max.	5 %
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Degree of protection IEC 60529	IP 67*
Connection cable	5 m, PVC, 2 x 0.14 mm ²
Housing material	PVC
Active surface	PVC
Lid	PA
Accessories (is delivered with the sensor)	2 nuts M 12 x 1

All specifications are subject to change without notice. (14.10.2022)

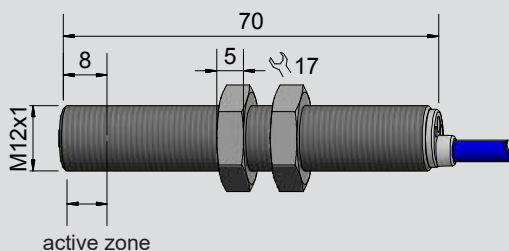

Matching Ex barriers can be offered on request.



* With sealed potentiometer screw

Made in Germany