



Capacitive Sensors Series 95 - AC / DC

- Housing M 32 x 1.5
- Housing material: Brass
 - Sensing distance 2...25 mm adjustable
 - Potential-free change-over contact
 - Ex II 3D IP67 T101°C X
 - For use in zone 22

Certificate:





Technical data

Non-flush mountable

Operating distance S_n	20 mm
Operating distance min. / max. adjustable	2...25 mm
Electrical version	5-wire AC / DC
Output	Relay, 1 CO
Type	KAS-95-32-1CO-M32-PTFE/MS-3D
Art.-No.	KA 1007
Operating voltage (U_B)	20...250 V AC / DC
Load max. AC (I, U)	1 A, 250 V
Load max. DC (I, U, P)	1 A, 220 V, 60 W
No-load current (I_o)	2,1 mA
Frequency of operating cycles max.	2 Hz
Permitted ambient temperature	-20...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 6 x 0.34 mm ²
Housing material	Brass
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA
Media optimized	Yes

*With sealed potentiometer

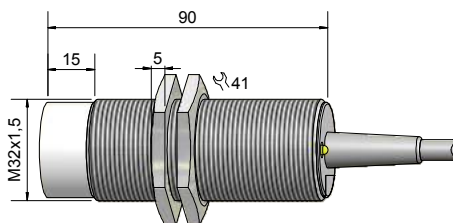

Made in Germany

All specifications are subject to change without notice. (20.11.2012)