




Capacitive Sensors Series 95 - AC / DC - Relay output

Housing G 1½"

- Housing material: POM
- Sensing distance 2...20 mm adjustable
- Normally open and normally closed function
- Potential-free change-over contact
- Switch-on and switch-off delay changeable
- Adjustable timer 1 sec - 10 min.



Technical data	Non-flush mountable
Level sensor, in contact with the product	Medium dependent adjustable
Operating distance min. / max. adjustable	2...20 mm
Electrical version	5-wire AC / DC
Output	Relay, 1 CO
Type	KAS-95-G11/2-1COR-G11/2-POM-TD-Z02-1-HP
Art.-No.	KA 1215
Operating voltage (U _B)	20...250 V AC / DC
Load max. AC (I, U, P)	2 A, 250 V, 60 VA
Load max. DC (I, U, P)	2 A, 220 V, 60 W
No-load current (I ₀)	2,1 mA
Frequency of operating cycles max.	2 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67*
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 5 x 0.34 mm ²
Housing material	POM
Active surface	POM
Lid	PBT
Accessories (not supplied with the sensor): Control tube and sensor holder please see our selection of accessories.	

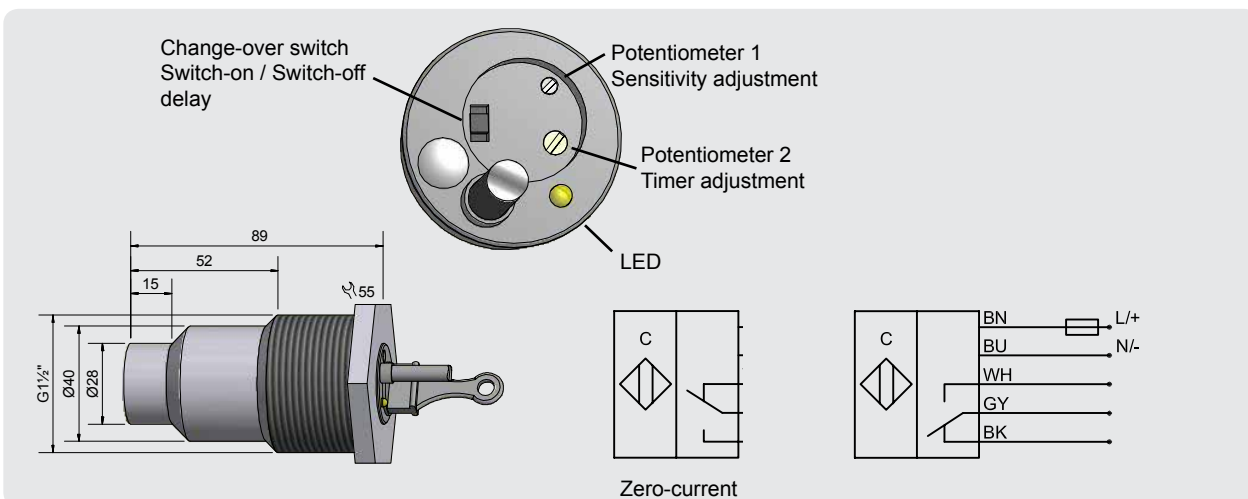

*With sealed potentiometer

Made in Germany