



L&V&L Capacitive Filling Level Probe

Analogue current output 4...20 mA


- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: GFK, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- With flange connector M 12 x 1 (5-pin Teach function included)
- Factory preset max. Value
- Automatic setting Min. when the probe is switched on for the first time




Technical data	
Active zones [M]	843 mm
Electrical version	4 - pin DC
Output function	Analogue
Type	KFI-1-900-843-GFK/VAc-D16-G1-IL4-ETW-E-Y10
Art.-No.	KI 0182
Operating voltage (U _B)	15...30 V DC
Permitted residual ripple max.	5 %
Load resistance (R _L)	≤ 200 Ω
Power consumption (outputs no-load)	0,9 W
Analogue output	4...20 mA
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1 (A-coded)
Housing material	VA No. 1.4305 / AISI 303
Active zone	GFK
Lid	PC (FDA 21 CFR 177.1580)
For matching connectors please see our selection of accessories.	

EasyTeach chart:

- LED green / Adjustment function
- Adjustment Min.
 - Adjustment Max.
 - Factory set
 - Test



Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.

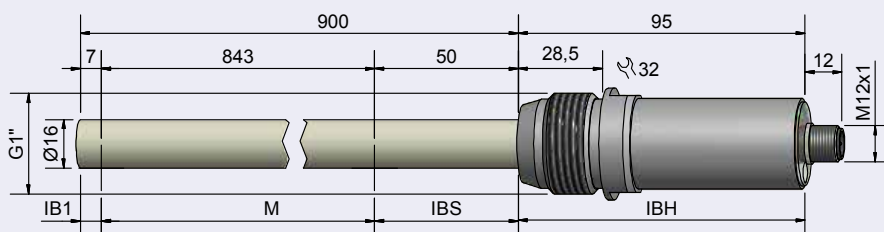

*Where applicable

Made in Germany

All specifications are subject to change without notice. (09.12.2019)